


Decision tree for Distributed Generation Connections

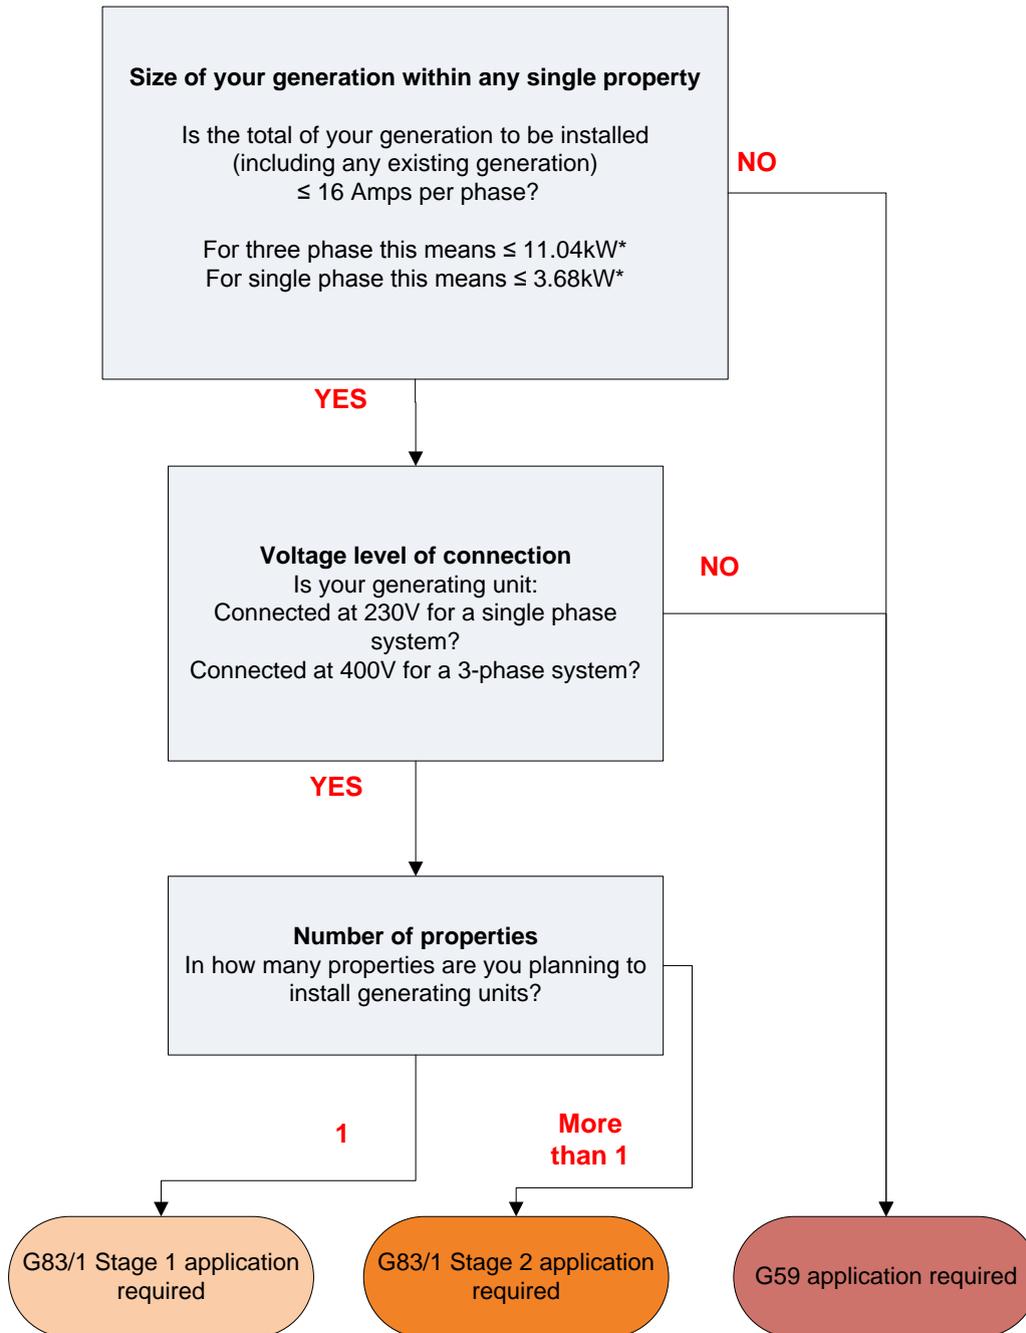

There are three types of distributed generation connection. This flowchart will help you to understand which type of connection application you need to make

*The 16 amps per phase threshold equates to 3.68kW per phase. The G83 limit is based on the certified continuous steady state operating rating of the inverter, subject to a maximum installed generation capacity of 4kW single phase and 12kW three phase. For example, a standard 3.98kWp solar PV installation using a certified 3.68kW rated inverter would be acceptable.